




MYK LATICRETE

LATICRETE® 340 Medium Bed Adhesive

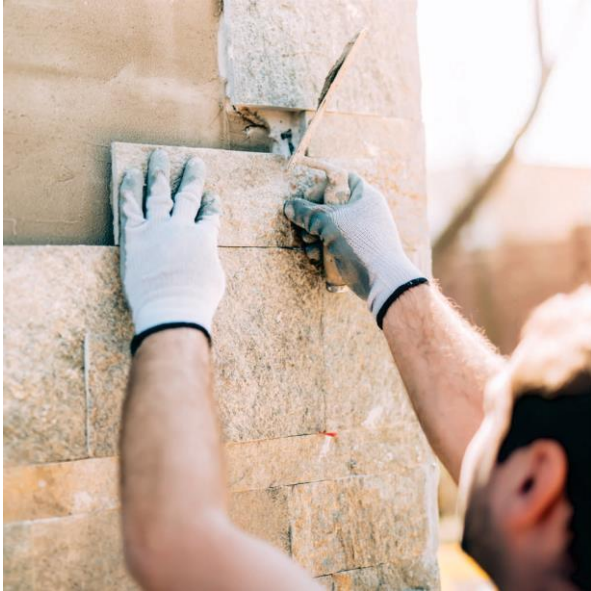

Highly polymer modified medium bed adhesive for fixing small to large format stones on interior and exterior wall.

Features / Benefits

- Single component, just add water
- High strength, polymer modified
- Non-sag & Easy to use
- Bonds to various substrates
- Exceeds ANSI A118.4 ET shear bond strength requirements
- Complies with EN / ISO with a C2TES1 classification.
- Exceeds IS 15477 – Type 3 Adhesive standards.
- Can be used up to 15mm bed thickness.

Application

Designed especially for interior and exterior wall installations of all types of natural stones over concrete and on a variety of substrates. Good underwater shear bond allows this product to be used for wet areas like swimming pools, sauna, water bodies and wash rooms. Can be used for tile on tile applications, ceramic and vitrified tiles also.

Substrates

- Concrete & Concrete Masonry
- MIVON Concrete, Precast concrete
- Cement Plaster
- Ceramic tile, Vitrified Tile and Natural Stone
- Brick Masonry
- Cement Backer Board**
- Cement Terrazzo
- Calcium Silicate Board**
- Gypsum Wallboard**

**Consult the backer board manufacturer's data sheet for the specific recommendations and load bearing capacity of specific board intended for use.

Certifications

IS 15477
Type: 3

Member of
Indian Green Building Council



EN: C2TES1



A118.4ET

TECHNICAL DATA

Performance Properties:

LATICRETE® 340 Medium Bed Adhesive mixed with Water

Applicable Standards:

ANSI A118.4; EN 12004 & ISO 13007; IS15477

| ANSI Data | | |
|--|------------------------|--------------------------------------|
| Property: Test method | Requirement | Typical Values |
| Open Time (30 Minutes at 28 days): ANSI A118.4 Clause – 5.3 | ≥75 psi (0.50 Mpa) | 135 psi – 150 psi (0.92 – 1.03 Mpa) |
| Sag: ANSI A118.4- Clause 6.0 | ≤0.02 Inches (0.50 mm) | 0.01 – 0.012 Inches (0.25 – 0.30 mm) |
| Glazed wall tile Shear Strength | | |
| 7 Days: ANSI A118.4 – Clause 7.1.2 | >300psi (2.07Mpa) | 360-380 psi (2.47 Mpa-2.61 Mpa) |
| 7 Days Water immersion: ANSI A118.4- Clause 7.1.3) | >200psi (1.38Mpa) | 250-275 psi (1.72 Mpa-1.89 Mpa) |
| Porcelain Mosaic Tile Shear Strength | | |
| 1 Day: ANSI A118.4 – Clause 7.2.2 | >75psi (0.50Mpa) | 125 - 175 psi (0.86 – 1.20 Mpa) |
| 7 Days: ANSI A118.4 – Clause 7.2.3 | >200psi (1.38Mpa) | 275 - 325 psi (1.89 – 2.23 Mpa) |
| 7 Days Water immersion: ANSI A118.4 – Clause 7.2.4 | >150psi (1.03Mpa) | 250 - 300 psi (1.72 – 2.06 Mpa) |
| 28 Days: ANSI A118.4 – Clause 7.2.5 | >200psi (1.38Mpa) | 300 - 350 psi (2.06 – 2.40 Mpa) |
| 28 Days: W/ Freeze-Thaw cycling. ANSI A118.4 – Clause 7.2.5 | >175psi (1.20Mpa) | 250 - 275 psi (1.72 – 1.89 Mpa) |
| 12 Weeks: ANSI A118.4 – Clause 7.2.7 | >200psi (1.38Mpa) | 300 - 350 psi (2.06 – 2.40 Mpa) |
| Quarry Tile Shear Strength | | |
| 28 Days : ANSI A118.4 – Clause 7.3.2 | >150psi (1.03Mpa) | 200 - 230 psi (1.37 – 1.58 Mpa) |
| 28 Days : W/ Freeze-Thaw cycling. ANSI A118.4 – Clause 7.3.3 | >100psi (0.69Mpa) | 175 - 200 psi (1.20 – 1.58 Mpa) |

The adhesive mortar conforms to ANSI A118.4ET

| EN / ISO Data | | |
|---|-------------------------|-------------------------------|
| Property: Test Method | Requirement | Typical Values |
| Open Time: EN 1346 | ≥0.50 N/mm ² | 0.85 – 1.00 N/mm ² |
| Slip Resistance: EN 1308 | ≤0.50 mm | 0.20 - 0.30 mm |
| Tensile Adhesion Strength | | |
| Initial: EN 1348 – Clause 8.2 | ≥1.00 N/mm ² | 1.50 – 1.75 N/mm ² |
| After Water Immersion: EN 1348 - Clause 8.3 | ≥1.00 N/mm ² | 1.30 – 1.50 N/mm ² |
| Heat Ageing: EN 1348 – Clause 8.4 | ≥1.00 N/mm ² | 1.20 – 1.30 N/mm ² |
| Freeze- Thaw: EN 1348 – Clause 8.5 | ≥1.00 N/mm ² | 1.50 – 1.75 N/mm ² |
| Transverse Deformation: EN12002 | ≥2.5mm <5.00mm | 3mm-3.5mm |

The adhesive mortar conforms to EN12004 / ISO 13007 as C2TES1

| IS Data | | |
|---|-------------|------------------|
| Property : Test method | Requirement | Typical Values |
| Shear Adhesion | | |
| Dry Conditions (24 Hours) – Annex B (Clause 4.6) | Min.4.0 kN | 5.00 – 6.00 kN |
| Dry Conditions (14 Days) – Annex B (Clause 4.6) | Min.10.00kN | 11.50 – 12.50 kN |
| Heat Ageing (7 Days Std + 7 Days Oven) – Annex B (Clause 4.6) | Min.5.00 kN | 6.00 – 6.50 kN |
| Wet Conditions (7 Days Std + 7 Days Water) – Annex B (Clause 4.6) | Min.5.00 kN | 6.50 – 7.00 kN |

The Adhesive mortar conforms to IS 15477: Type 3 Adhesive

Packaging:

30 kg bags

Colour:

Grey and white

Coverage:

Approx. 33-38 Sft per 30kg bag with 1/2" x 1/2" (12mm x 12mm) square notched trowel for average bed of 6mm. Coverage will vary depending on trowel notch size, type and size of tile and substrate smoothness and evenness.

Working Properties at 70° F (21° C)

LATICRETE®340 Medium Bed Adhesive mixed with Water

| | |
|-----------------------|---------------|
| Open Time | 30 minutes |
| Adjustability Time | 30 minutes |
| Pot Life | 4 hours |
| Time to Heavy Traffic | 16 - 24 hours |

Specifications subject to change without notification.

Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

INSTALLATION

Surface Preparation:

All surfaces should be between 40° F(4°C) and 104° F(40°C) and structurally sound, clean and free of all dirt, oil, grease, loose peeling paint, laitance, concrete sealers or curing compounds.

Check the surface to be true to plumb. All slabs must be plumb and true to within ¼" (6mm) in 10 ft (3m). Rough or uneven concrete surfaces should be made smooth with LATICRETE® Screed/Plaster material to provide a wood float (or better) finish.

Dry, dusty concrete slabs or masonry should be dampened, and excess water swept off. Installation may be made on a damp surface. New concrete slabs shall be damp cured and 28* days old before application.

*No minimum cure time for concrete slabs when thin-set mortar is mixed with latex additive.

Expansion joints shall be provided through the tile work from all construction or expansion joints in the substrate. Do not cover expansion joints with thin set mortar. Follow ANSI Specification AN-3.8 "Requirements for Expansion Joints" or TCA Detail EJ171 "Expansion Joints". For tile installation over Cement Backer Board: follow TCA installation details W244.

NOTES: For tile or stone installations on plywood and wood substrates, MYK LATICRETE DWA 215 OR MYK LATICRETE PUA 212 is recommended. Please refer

specific product Technical Data Sheet for detailed recommendations.

For all stone with a back-protection mesh, it is important to remove the mesh first and also remove the epoxy layer by light grinding to ensure perfect bond with the adhesive.

Mixing:

Place clean, potable water into a clean mixing bowl. Add LATICRETE® 340 powder into the mixing bowl. Use approximately 8.5 – 9 L of water for 30 kg of powder.

Mix by hand or with a slow speed mixer to a smooth, trowelable consistency. Allow adhesive to slake for 5-10 minutes. Adjust consistency if necessary. Remix and apply with the proper sized notched trowel.

Note: Addition of MYK LATICRETE® latex admix*, partially or completely replacing water would enhance the bond strength, flexibility of the medium bed mortar.

* Contact MYK LATICRETE technical services for large format tile or stone installations on exterior surfaces.

APPLICATION:

Natural Stone Installation:

Apply adhesive to the substrate with the flat side of the trowel, pressing firmly to work into surface. Comb on additional adhesive with the notched side. Use the proper sized notched trowel to ensure full bedding of the stone. Spread as much adhesive as can be covered with stone in 10 minutes. Back butter large format stones (> 12"x12") to provide full bedding and firm support. Place stones into wet, sticky adhesive and beat in using a beating block and rubber mallet to imbed stone and adjust level. Check adhesive for complete coverage by periodically removing a stone and inspecting bedding adhesive transfer onto back of stone. Use of MYK LATICRETE spacers is recommended to provide grout joints between stones. The joint width shall be as per the recommendation of architect / engineer. Remove the spacers when the adhesive is set firm.

If adhesive is skinned over (not sticky), remove and replace with fresh adhesive.

For highly absorbent natural stones which may form a wet patch when adhesive is used, it is recommended to use suitable Laticrete Impregnating sealer on all sides.

LATICRETE 3642 Latex admix can also be used as a bottom coat for natural stones to prevent wet patches during installation. Please refer Technical Data Sheets of product intended for use for specific instructions of use

NOTE TO THE SPECIFIER AND INSTALLER:

While installing stone on the external walls, we need to provide the joints by creating spaces between the stones and fill them up with MYK LATICRETE cement-based grout mixed with MYK LATICRETE 1776 grout admix plus or flexible grout. (In the absence of spacer joints, the surface movements can push stones away from the substrate causing de-bonding of stones)

The exterior stone installations shall be provided with joints (spaces) on the periphery of the area without allowing the stone to be bound by the peripheral masonry work or plaster.

HOT & COLD WEATHER TILING:

* Please refer technical document on Hot & Cold weather tiling

Grouting:

Grout installation shall be commenced after a minimum of 24 hours curing time at 70°F (21° C). Grout with MYK LATICRETE® Sanded or Unsanded Grout mixed with MYK LATICRETE® 1776 Grout Admix Plus.

For maximum stain resistance of Internal spacer joints applications, use SpectraLOCK® Pro Premium Grout OR LATAPOXY® SP-100 Stain free Grout.

For maximum stain resistance of External spacer joints applications, use MYK LATICRETE Stellar Grout, which can accommodate movements and is UV resistant.

CUSTOMER CARE

MYK LATICRETE India Pvt Ltd.

8-2-703/A, Fourth Floor, Leela Gopal Towers,
Road No-12, Banjara Hills, Hyderabad – 500034

(T.S) Tel: +91-40-6817 3100

Customer Care: cc@myklaticrete.com

Website: www.myklaticrete.com